


SJKM-401 / 901 / 1601 (MPEG-4, 4 / 9 / 16CH DVR)

Digital Security System

PERFORMANCE & RELIABILITY

MPEG-4

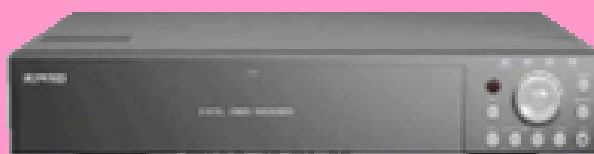

Feature :


- High quality video Display and Recording: NTSC(720x480), PAL(720x576)
- Multi-Recording/ Search Categories: Date/ Time, Event, Manual, Schedule
- Real time recording support: 120 Fps for NTSC at (100 Fps for PAL) – 4ch Audio
- Pentaplex: Live, Record, Playback, Back-up and Network as the same time
- Backup: USB 2.0 support
- PTZ camera control in local and remote area
- Manual/ Schedule, alarm/ motion recording Modes
- Static, Dynamic IP and DDNS and Multi-user accessing support
- Remote Live Monitoring, file searching, Backup, Playback and PTZ camera control





SJKM-401 / 901 / 1601 (MPEG-4, 4 / 9 / 16CH DVR)

SYSTEM CONFIGURATION

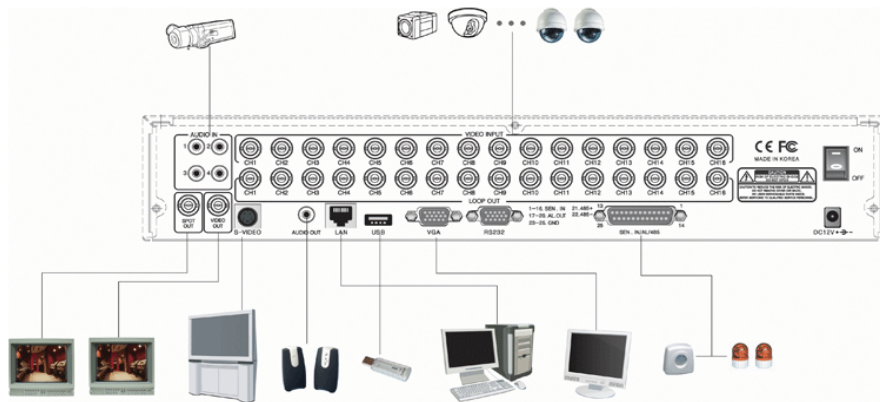

FUNCTIONAL SPECIFICATIONS

Description		Specification		
		SJKM-401	SJKM-901	SJKM-1601
Video	Video Input	4 ch	9 ch	16 ch
		(BNC)1.0Vp-p, 75Ω		
	Video Output	5 outputs (BNC/VGA/S-video/Spot / Loop through)		
Audio	Audio Input/Output	4ch Input and 1ch output		
Digital Processing and Storing	Compression	MPEG-4		
	Video Freq	24Kbyte/s		
	Audio Size Rate	86.4Mbyte/hour		
	Video Size Rate	22.5-1260Mbyte/hour		
	Storage	3 IDE hard disk , support 300G or larger for each HDD		
Resolution	Display	NTSC: 720X480, PAL:720X576, Single, Quad, Sequential image		
	Recording	NTSC: 720X480, 320X240, PAL: 750X576, 360X288 active pixels		
Alarm	Output	1ch Independent Alarm		
Frame rate	Recording (FPS)	NTSC – 120 fps / PAL – 100 fps		
Network	Protocol	10/100 Base-T TCP/IP, UDP, HTTP, SMTP, NTP, DHCP, DDNS		
	Network Function1	Easy GUI, Live Monitoring, Remote Configuration, PTZ control, Backup and Playback		
	Network Function2	Multi-user accessing, Two way audio support, NTP Option: CMS software		
PTZ	Pan/Tilt/Zoom	RS485		
Back-up	Internal	2 HDD / CD-RW (DVD-RW) [expandable to 4 HDDs without CD-RW]		
F/W upgrade	Network / USB2.0	Firmware Upgrade via USB, network		
Other	Power	DC 12 V, 5A		
	Working Temperature	-10~50℃		
	External Dimensions	430(W) × 75(D) × 358(H)mm		

The above specification can be changed without previous notice for improvement of product.

Lifecom Technologies (HK) Co., Ltd.

Room 2, 16/F, Island Centre, 470 Reclamation ST., Mong Kok, Kln.

Tel. : 3589 6755

Fax: 3427 3318

E-mail: info@lifecomhk.com

Web-Site: www.lifecomhk.com